

NATURAL CREATIONS®

ArborArt® • EarthCuts® • Mystix®

Luxury Vinyl Tile (LVT)



COMMERCIAL FLOORING

The essence of earth's woods and stones, plus design trends in multiple sizes is displayed in the Natural Creations collection of luxury vinyl tile. It features CONTINUUM™ colors and designs that coordinate with Armstrong REJUVENATIONS™ sheet flooring. The durable, abrasion-resistant wear layer allows for years of good looks while the UV-cured urethane coating may eliminate the need for polishes in some areas. Awarded ADEX Gold for Design Excellence, Natural Creations offers traditional, rustic and exotic wood-looks in ArborArt, natural surface characteristics and color variation in EarthCuts and contemporary design trends in Mystix.

PRODUCT INFORMATION				
Construction	Solid Vinyl Tile [a.k.a. Luxury Vinyl Tile (LVT)]			
Product Line	Natural Creations – ArborArt, EarthCuts, Mystix			
International Product Specifications	ASTM F 1700, Class III, Type B – embossed surface			
Overall Thickness	0.125 in. (3.2 mm)			
Wear Layer Thickness	0.020 in. (0.5 mm)			
Finish	UV-cured Polyurethane			
Installation	Full Spread Adhesives – S-288 Premium, S-543 High-Moisture, S-240 Epoxy			
Maintenance Options	Polish No Polish – Spray Buff/No Buff			
PACKAGING				
Tile Sizes	12 in. x 12 in. (305 mm x 305 mm)	4 in. x 36 in. (102 mm x 914 mm)		
	16 in. x 16 in. (406 mm x 406 mm)	6 in. x 36 in. (152 mm x 914 mm)		
	18 in. x 18 in. (457 mm x 457 mm)	6 in. x 48 in. (152 mm x 1219 mm)		
	12 in. x 24 in. (305 mm x 610 mm)	8 in. x 36 in. (203 mm x 914 mm)		
	18 in. x 36 in. (457 mm x 914 mm)	9 in. x 48 in. (229 mm x 1219 mm)		
Shipping Weight	Contact Techline – www.armstrong.com/commflooringna/flooring-techline.html			
PERFORMANCE	TEST METHOD	MINIMUM REQUIREMENT	PERFORMANCE VS. REQUIREMENT	
ASTM F 1700	Thickness	ASTM F 386	Nominal ± 0.005 in.	Meets
	Size	ASTM F 2055	± 0.016 in. per linear foot	Exceeds
	Squareness	ASTM F 2055	0.010 in. max	Exceeds
	Residual Indentation	ASTM F 1914	Average less than 8%	Exceeds
	Flexibility	ASTM F 137	≤ 1.0 in., no cracks or breaks	Exceeds
	Dimensional Stability	ASTM F 2199	≤ 0.024 in. per linear foot	Exceeds
	Chemical Resistance	ASTM F 925	No more than slight change in surface dulling, attack or staining	Meets or Exceeds
	Resistance to Heat	ASTM F 1514	ΔE ≤ 8	Exceeds
	Resistance to Light	ASTM F 1515	ΔE ≤ 8	Exceeds
Supplementary	Static Load Limit – Subjective Visual	ASTM F 970	No visually apparent indentation	250 psi
	Fire Test Data – Flame Spread	ASTM E 648	0.45 watt/cm ² or more Class I	Meets
	Fire Test Data – Smoke Evolution	ASTM E 662	450 or less	Meets
	Fire Test Data – Canada	CAN/ULC S-102.2	Use dependent	Flame Spread – 90 Smoke Developed – 385
	Certified Low Emitting Product	LEED® EQ4.3	Meets Guidelines	Meets
	Certified Low Emitting Adhesive	LEED EQ4.1	Meets Guidelines	Meets
	Plant Certification	ISO 14001	Meets Certification Guidelines	Certified
	Indoor Air Quality	FloorScore™	Meets Certification Guidelines	Certified
	Indoor Air Quality	CHPS 01350	Meets Certification Guidelines	Certified
NSF/ANSI 332	Sustainability Assessment	Meets Certification Guidelines	Gold Level Certified	
WARRANTY				
10-Year Commercial Warranty when installed in accordance with Armstrong's Guaranteed Installation Systems manual, F-5061.				
LINKS				
Installation Instructions – www.armstrong.com/pdbupimages/194605.pdf				
Maintenance Information – www.armstrong.com/pdbupimages/197965.pdf				
View the full line – www.armstrong.com/commflooringna/products/lvt				
Email Techline – www.armstrong.com/commflooringna/contact_techline.jsp				

NATURAL CREATIONS®

ArborArt® • EarthCuts® • Mystix®


Luxury Vinyl Tile (LVT)



COMMERCIAL FLOORING

Sustainability Facts

Serving LVT	As Served
Certified to meet LEED® EQ Credit: Low Emitting Interiors	✓
Adhesives	
Certified to meet LEED® EQ Credit: Low Emitting Interiors	✓
FloorScore™ Certified to CDPH Standard Method V1.1-2010	✓
Collaborative for High Performance Schools CHPS-IEQ2.2 & LABS-21 IEQ4.3	✓
ISO 14001 Plant Certification	✓
U.S. Green Building Council Member	✓
Canada Green Building Council Member	✓
NSF/ANSI 332 Gold Level Certified	✓
Low Maintenance Option	✓

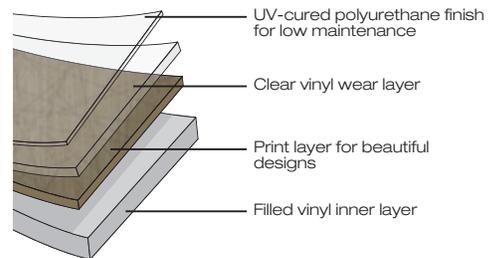

ArborArt



EarthCuts



Mystix

