


# CIRRUS® Profiles

Chamfered, Beveled & Classic Step™ – Tegular  
medium texture



Cirrus Classic Step with Suprafine® 9/16" suspension system (Pg. 266)


## KEY SELECTION ATTRIBUTES

- Classic edge details on refined Cirrus texture
- High quality factory-finished edge detail
- Excellent sound absorption
- 94% Biobased content (see page 331)

## TYPICAL APPLICATIONS

- Offices
- Conference rooms
- Lobbies/reception areas
- Public spaces/areas

**DETAIL** (Other Suspension Systems compatible. Refer to listing on page 156.)

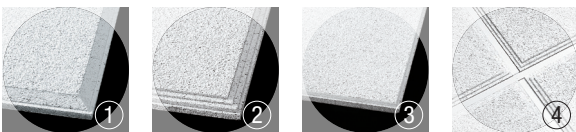

1. Cirrus Chamfered
2. Cirrus Classic Step
3. Cirrus Beveled Tegular
4. Cirrus Classic Step with Suprafine 9/16" suspension system

## COLOR



White

# CIRRUS® Profiles

## Chamfered, Beveled & Classic Step™ – Tegular

medium texture

UP TO **57%** RECYCLED CONTENT

**LEED®**

acoustics energy daylight & views indoor air quality renewable materials recycled content waste mgmt local\* materials

EPD AVAILABLE For select items only

Calculate LEED contribution at [armstrong.com/greengenie](http://armstrong.com/greengenie) \*LOCATION DEPENDENT



### VISUAL SELECTION


### PERFORMANCE

Dots represent high level of performance.

Edge Profile	Susp. Dwg. Pgs. 273-277 <a href="http://armstrong.com/catdwgs">armstrong.com/catdwgs</a>	Item No.	Dimensions (Inches)	Acoustics		Fire Rating	Light Reflect	Anti-Mold & Mildew	Sag Resist	Certified Low VOC Emissions	Durability	Primary (Embodied) Energy	Recycled Content*	Recycle Program	Warranty*
				NRC	CAC										
<b>CIRRUS Profiles Chamfered**</b>				UL Classified				BioBlock+	Humi-Guard+			Below 11MJ/SF		Yes	No. of Years
15/16" Tegular	17	<b>628</b>	24 x 24 x 3/4"	0.65	35	Class A	0.85	•	•	•	Std	•	High	•	30
9/16" Tegular	30	<b>557</b>	24 x 24 x 3/4"	0.65	35	Class A	0.85	•	•	•	Std	•	High	•	30
<b>CIRRUS Profiles Beveled</b>															
9/16" Tegular	29	<b>590</b>	24 x 24 x 3/4"	0.65	35	Class A	0.85	•	Std	•	Std	•	High	•	10
<b>CIRRUS Profiles Classic Step</b>															
15/16" Tegular	18	<b>591</b>	24 x 24 x 3/4"	0.65	35	Class A	0.85	•	•	•	Std	•	High	•	30
	19	<b>626</b>	24 x 24 x 3/4"	0.65	35	Class A	0.85	•	Std	•	Std	•	High	•	10
9/16" Tegular	31	<b>591</b>	24 x 24 x 3/4"	0.65	35	Class A	0.85	•	•	•	Std	•	High	•	30
	32	<b>585</b>	24 x 24 x 3/4"	0.65	35	Class A	0.85	•	Std	•	Std	•	High	•	10

\*\* Ceiling design copyrighted by AWI Licensing Co.

### SUSPENSION SYSTEMS



### PHYSICAL DATA

#### Material

Wet-formed mineral fiber

#### Surface Finish

Factory-applied latex paint

#### Fire Performance

ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index 25 or less. Smoke Developed Index 50 or less. (UL labeled)

#### ASTM E1264 Classification

557, 591, 628 – Type III, Form 1, Pattern E I  
585, 590, 626 – Type III, Form 1, Pattern E I K  
Fire Class A

#### Sag Resistance

HumiGuard® Plus – superior resistance to sagging in high humidity conditions up to, but not including, standing water and outdoor applications. Excludes items 585, 590, 626.

#### Anti Mold/Mildew & Bacteria

BioBlock® Plus contains an anti-microbial treatment and provides guaranteed resistance against growth of mold/mildew and Gram-positive and Gram-negative odor/stain-causing bacteria for 30 years.

#### VOC Emissions

Third party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.1, 2010. This standard is the guideline for low emissions in LEED, CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

#### Primary (Embodied) Energy

See all LCA information on our EPD's.

#### High Recycled Content\*

Contains greater than 50% total recycled content. Total recycled content based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines.

#### Insulation Value

R Factor – 1.9 (BTU units)  
R Factor – 0.33 (Watts units)

#### 30-Year Performance Guarantee & Warranty\*

When installed with Armstrong Suspension System. Details at [armstrong.com/warranty](http://armstrong.com/warranty)

#### Weight: Square Feet/ Carton

590, 591 – 1.06 lbs/SF; 48 SF/ctn  
557, 585, 626, 628 – 1.17 lbs/SF; 48 SF/ctn

#### Minimum Order Quantity

1 carton

#### Metric Items Available

628M, 557M, 590M, 591M, 626M, and 585M – Metric items are subject to extended lead times and minimum quantities. Contact your representative for more details.

