


CIRRUS®
Square Lay-in
medium texture




UP TO **80%** RECYCLED CONTENT

LEED®

acoustics energy daylight & views indoor air quality renewable materials recycled content waste mgmt local* materials

EPD AVAILABLE

Calculate LEED contribution at armstrong.com/greengenie *LOCATION DEPENDENT

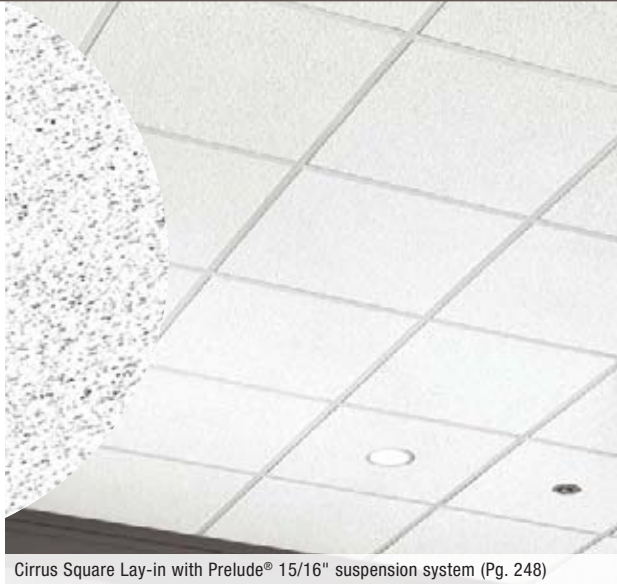

Cirrus Square Lay-in with Prelude® 15/16" suspension system (Pg. 248)

KEY SELECTION ATTRIBUTES

- Refined visual
- Excellent sound absorption
- Ceiling-2-Ceiling™ Post-consumer Recycled Content options:
Items 574HRC and 533HRC.
65% Pre-consumer;
15% Post-consumer
- 94% Biobased content (see page 331)

TYPICAL APPLICATIONS

- Offices
- Healthcare – Assists in addressing HIPAA and FGI acoustical requirements
- Conference rooms
- Lobbies
- Public spaces/areas
- Department stores/retail



COLOR




VISUAL SELECTION

PERFORMANCE Dots represent high level of performance.

Edge Profile	Susp. Dwg. Pgs. 273-277 armstrong.com/catdwgs	Item No.	Dimensions (Inches)	Acoustics		Fire Rating	Light Reflect	Anti-Mold & Mildew	Sag Resist	Certified Low VOC Emissions	Durability	Primary (Embodied) Energy	Recycled Content*	Recycle Program	Warranty†
				NRC	CAC										
CIRRUS Square Lay-in				UL Classified			BioBlock+	Humi-Guard+			Below 11MJ/SF		Yes	No. of Years	
15/16" Square Lay-in	1	574 574HRC	24 x 24 x 3/4" 24 x 24 x 3/4"	0.70 •	35	Class A	0.86 •	•	•	•	Std	•	Std High	•	30
	1	533 533HRC	24 x 48 x 3/4" 24 x 48 x 3/4"	0.70 •	35	Class A	0.86 •	•	Std	•	Std	•	Std High	•	10
	1	FastSize™	W: 4" - 24" / L: 4" - 60" 3/4" Thick	0.70 •	35	Class A	0.86 •	•	Std	•	Std	•	High	•	10

SUSPENSION SYSTEMS



PHYSICAL DATA

Material
Wet-formed mineral fiber

Surface Finish
Factory-applied latex paint

Fire Performance
ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index 25 or less. Smoke Developed Index 50 or less. (UL labeled)

ASTM E1264 Classification
Type III, Form 1, Pattern E I
Fire Class A

Sag Resistance
HumiGuard® Plus – superior resistance to sagging in high humidity conditions up to, but not including, standing water and outdoor applications. Excludes items 533, 533HRC, and large sizes.

Anti Mold/Mildew & Bacteria
BioBlock® Plus contains an anti-microbial treatment and provides guaranteed resistance against growth of mold/mildew and Gram-positive and Gram-negative odor/stain-causing bacteria for 30 years.

VOC Emissions
Third party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.1, 2010. This standard is the guideline for low emissions in LEED, CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

Primary (Embodied) Energy
See all LCA information on our EPD's.

High Recycled Content*
Contains greater than 50% total recycled content. Total recycled content based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines.

Insulation Value
R Factor – 1.9 (BTU units)
R Factor – 0.33 (Watts units)

30-Year Performance Guarantee & Warranty†
When installed with Armstrong Suspension System. Details at armstrong.com/warranty


Weight; Square Feet/Carton
533 – 1.21 lbs/SF; 48 SF/ctn
574 – 1.10 lbs/SF; 48 SF/ctn

Minimum Order Quantity
1 carton

Metric Items Available
574M, 533M – Metric items are subject to extended lead times and minimum quantities. Contact your representative for more details.




CIRRUS®
Tegular
medium texture



10-YEAR Availability Items 584, 589



Cirrus Beveled Tegular with Suprafine® 9/16" suspension system (Pg. 266)



Visit Armstrong.com
Photo Gallery to view more
installation photos
SEARCH: cirrus

KEY SELECTION ATTRIBUTES

- Refined visual
- Excellent sound absorption
- Ceiling-2-Ceiling™ Post-consumer Recycled Content options: Items 589HRC, 539HRC, 584HRC, 535HRC. 65% Pre-consumer; 15% Post-consumer
- 94% Biobased content (see page 331)

TYPICAL APPLICATIONS


- Offices
- Healthcare – assists in addressing HIPAA and FGI acoustical requirements
- Conference rooms
- Lobbies
- Department stores/retail
- Public spaces/areas

COLOR SELECTION Due to printing limitations, shade may vary from actual product.



Items 584, 589 are available in colors. All other items are available in White only. Colored ceilings are dye-lotted and should be segregated by dye lot. Do not mix.

DETAIL (Other Suspension Systems compatible. Refer to listing on page 152.)

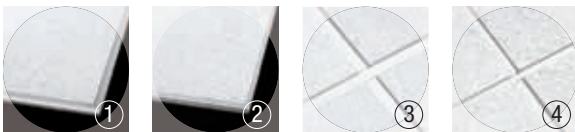

1. Cirrus Angled Tegular
2. Cirrus Beveled Tegular
3. Cirrus Angled Tegular with Prelude® 15/16" suspension system
4. Cirrus Beveled Tegular with Suprafine 9/16" suspension system

CIRRUS®
Tegular
medium texture

HRC items contain 15% or greater post-consumer recycled ceilings



UP TO **80%** RECYCLED CONTENT

EPD
AVAILABLE For select items only

LEED®



Calculate LEED contribution at armstrong.com/greengenie

*LOCATION DEPENDENT


VISUAL SELECTION

PERFORMANCE Dots represent high level of performance.

Edge Profile	Susp. Dwg. Pgs. 273-277 armstrong.com/catdwgs	Item No.	Dimensions (Inches)	Acoustics		Fire Rating	Light Reflect	Anti-Mold & Mildew	Sag Resist	Certified Low VOC Emissions	Durability	Primary (Embodied) Energy	Recycled Content*	Recycle Program	Warranty†		
				NRC	CAC												
CIRRUS Tegular																	
	13	584 ^{♦♦} 584HRC 584M	24 x 24 x 3/4" □	0.70	35	Class A	0.86	•	•	•	Std	•	High High High	•	30		
			24 x 24 x 3/4" □	•	•	•	•	•	•	•	•	•	•	•	•	•	
			600 x 600 x 19mm	•	•	•	•	•	•	•	•	•	•	•	•	•	
			13	578	24 x 24 x 3/4" □	0.35	35	Fire Guard	0.86	•	•	-	Std	-	Std	•	30
					24 x 24 x 7/8" □	0.70	38	Class A	0.86	•	•	-	Std	-	High	•	30
					24 x 24 x 7/8" □	0.70	40	Class A	0.86	•	•	-	Std	-	High	•	30
					24 x 24 x 7/8" □	0.70	40	Class A	0.86	•	•	-	Std	-	High	•	30
					24 x 48 x 7/8" □	0.70	40	Class A	0.86	•	Std	-	Std	-	High	•	10
	13	535 535HRC	24 x 48 x 3/4" □	0.70	35	Class A	0.86	•	Std	•	Std	•	Std High	•	10		
			24 x 48 x 3/4" □	•	•	•	•	•	•	•	•	•	•	•	•		
			W: 4" - 24" / L: 4" - 60" 3/4" thick	0.70	35	Class A	0.86	•	Std	•	Std	•	Std	•	•	10	
	29, 44, 48, 52, 56, 60	589 ^{♦♦} 589HRC 589M	24 x 24 x 3/4" □	0.70	35	Class A	0.86	•	•	•	Std	•	High High High	•	30		
			24 x 24 x 3/4" □	•	•	•	•	•	•	•	•	•	•	•	•		
			600 x 600 x 19mm	•	•	•	•	•	•	•	•	•	•	•	•		
			29, 44, 48, 52, 56, 60	538 ^{**}	24 x 24 x 7/8" □	0.70	38	Class A	0.86	•	•	-	Std	-	High	•	30
					24 x 24 x 3/4" □	0.35	35	Fire Guard	0.86	•	•	-	Std	-	Std	•	30
					24 x 24 x 7/8" □	0.70	40	Class A	0.86	•	•	-	Std	-	High	•	30
					24 x 24 x 7/8" □	0.70	40	Class A	0.86	•	•	-	Std	-	High	•	30
					24 x 48 x 7/8" □	0.70	40	Class A	0.86	•	Std	-	Std	-	High	•	10
	29, 44, 48, 52, 56, 60	539 539HRC	24 x 48 x 3/4" □	0.70	35	Class A	0.86	•	Std	•	Std	•	High High	•	10		
			24 x 48 x 3/4" □	•	•	•	•	•	•	•	•	•	•	•	•		
			W: 4" - 24" / L: 4" - 60" 3/4" thick	0.70	35	Class A	0.86	•	Std	•	Std	•	Std	•	•	10	

♦♦ Add 2-letter color suffix to item number when specifying or ordering (e.g., 584 Q B).

SUSPENSION SYSTEMS



PHYSICAL DATA

Material

Wet-formed mineral fiber

Surface Finish

Factory-applied latex paint

Fire Performance

ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index 25 or less. Smoke Developed Index 50 or less. (UL labeled) Fire Guard™: A fire resistive ceiling when used in applicable UL assemblies

ASTM E1264 Classification

Type III, Form 1, Pattern E I
Fire Class A

Sag Resistance

HumiGuard® Plus – superior resistance to sagging in high humidity conditions up to, but not including, standing water and outdoor applications. Excludes items 535, 539, 581, 583.

Anti Mold/Mildew & Bacteria

BioBlock® Plus contains an anti-microbial treatment and provides guaranteed resistance against growth of mold/mildew and Gram-positive and Gram-negative odor/stain-causing bacteria for 30 years.

VOC Emissions

Third party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.1, 2010. This standard is the guideline for low emissions in LEED, CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

Primary (Embodied) Energy

See all LCA information on our EPD's.

High Recycled Content*

Contains greater than 50% total recycled content. Total recycled content based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines.

Insulation Value

R Factor – 1.9 (BTU units)
R Factor – 0.33 (Watts units)

30-Year Performance Guarantee & Warranty†

When installed with Armstrong Suspension System. Details at armstrong.com/warranty

Weight; Square Feet/Carton

534, 538, 572, 576 – 1.38 lbs/SF; 40 SF/ctn
535, 539, 581, 583 – 1.21 lbs/SF; 48 SF/ctn
577, 578 – 1.25 lbs/SF; 48 SF/ctn
584, 589 – 1.06 lbs/SF; 48 SF/ctn

Minimum Order Quantity

1 carton

Metric Items Available

584M, 578M, 534M, 572M, 581M, 535M, 589M, 538M, 577M, 576M, 583M, 539M – Metric items are subject to extended lead times and minimum quantities. Contact your representative for more details.

