


**DUNE™**


**Square Lay-in & Tegular**  
fine texture



Items 1772, 1773,  
1774, 1775, 1776



Dune Square Lay-in with Prelude® XL 15/16" suspension system (Pg. 259)

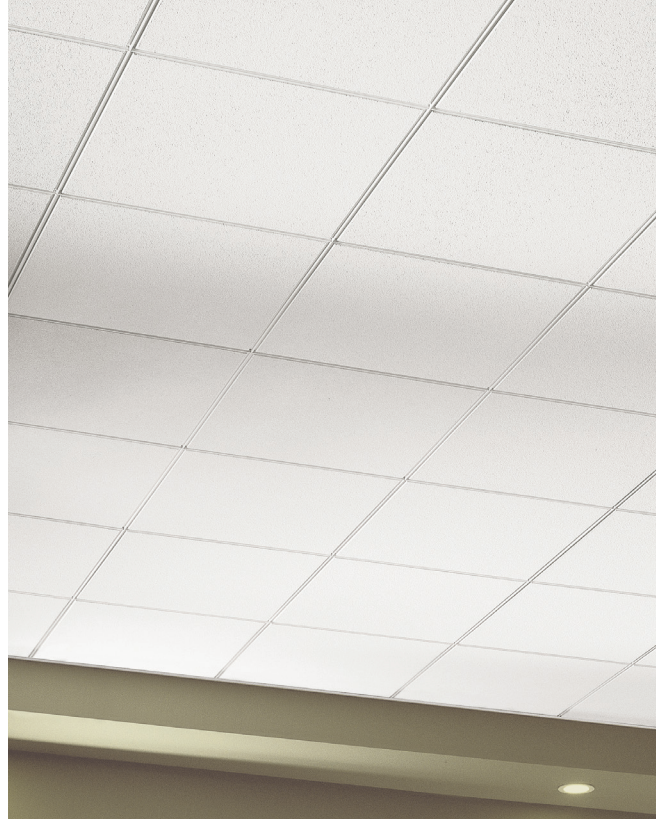

Dune Tegular with Interlude® XL 9/16" suspension system (Pg. 254)


#### KEY SELECTION ATTRIBUTES

- Upgrade look at a modest price
- Ceiling-2-Ceiling™ Post-consumer Recycled Content options: Items 1773HRC, 1774HRC, 1775HRC, 1776HRC, 1777HRC (check [armstrong.com/greengenie](http://armstrong.com/greengenie))
- 100% Biobased content (see page 331)
- Durable Scratch-resistant
- Non-directional visual reduces installation time and scrap
- 30-Year Limited System Warranty against visible sag (excludes items 1796 and 1798), mold/mildew, and bacterial growth

#### TYPICAL APPLICATIONS

- Offices
- Corridors
- Retail
- Hospitality
- Classrooms

#### DETAIL (Other Suspension Systems compatible. Refer to listing on page 168.)



1. Dune Tegular
2. Dune Square Lay-in with Prelude 15/16" suspension system
3. Dune Tegular with Suprafine® 9/16" suspension system
4. Dune Tegular with Silhouette® XL 9/16" suspension system 1/4" Reveal
5. Dune Tegular with Interlude XL 9/16" suspension system

#### COLOR



**DUNE™**

**Square Lay-in & Tegular**  
fine texture

HRC items contain 15%  
or greater post-consumer  
recycled ceilings



UP TO **54%** RECYCLED CONTENT

**LEED®**

**EPD**  
AVAILABLE

For select items only

acoustics

energy

daylight & views

indoor air quality

renewable materials

recycled content




























waste mgmt

local\* materials


Calculate LEED contribution at [armstrong.com/greengenie](http://armstrong.com/greengenie) \*LOCATION DEPENDENT

**VISUAL SELECTION**

**PERFORMANCE** Dots represent high level of performance.

Edge Profile	Susp. Dwg. Pgs. 273-277 armstrong.com/ catdwgs	Item No.	Dimensions (Inches)		Acoustics		Fire Rating 	Light Reflect 	Anti-Mold & Mildew 	Sag Resist 	Certified Low VOC Emissions	Durability 	Primary (Embodied) Energy	Recycled Content*	Recycle Program 	Warranty†
					NRC	CAC										
DUNE Square Lay-in					 UL Classified			BioBlock+	Humi-Guard+			Scratch	Below 11MJ/SF		Yes	No. of Years
	1	1772	24 x 24 x 5/8"		0.50	30	Class A	0.83 ●	●	●	●	●	●	Std	●	30
	1	1850	24 x 24 x 5/8"		0.50	35	Fire Guard	0.83 ●	●	●	●	●	—	Std	●	30
	1	 1773 1773HRC	24 x 48 x 5/8"		0.50	33	Class A	0.83 ●	●	●	●	●	●	Std High	●	30
	1	1851	24 x 48 x 5/8"		0.50	35	Fire Guard	0.83 ●	●	●	●	●	—	Std	●	30
	1	1796	20 x 60 x 5/8"		0.50	35	Class A	0.83 ●	●	Std	●	●	●	High	●	1
	1	1798	30 x 30 x 3/4"		0.50	35	Class A	0.83 ●	●	Std	●	●	●	High	●	1
	1	Other Sizes	W: 12" - 30" / L: 18" - 72" 5/8" or 3/4" Thick		0.50	35	Class A	0.83 ●	●	Std	●	●	—	Std	●	1
DUNE Tegular																
	11	 1774 1774HRC	24 x 24 x 5/8" 24 x 24 x 5/8"		0.50	35	Class A	0.83 ●	●	●	●	●	●	Std High	●	30
	11	1853	24 x 24 x 5/8"		0.50	35	Fire Guard	0.83 ●	●	●	●	●	—	Std	●	30
	11	 1776 1776HRC	24 x 48 x 5/8" 24 x 48 x 5/8"		0.50	35	Class A	0.83 ●	●	●	●	●	●	Std High	●	30
	11	Other Sizes	W: 12" - 30" / L: 18" - 72" 5/8" Thick		0.50	35	Class A	0.83 ●	●	Std	●	●	—	Std	●	1
	29, 44, 48, 52, 56, 60	 1775 1775HRC	24 x 24 x 5/8" 24 x 24 x 5/8"		0.50	35	Class A	0.83 ●	●	●	●	●	●	Std High	●	30
	29	1852	24 x 24 x 5/8"		0.50	35	Fire Guard	0.83 ●	●	●	●	●	—	Std	●	30
	29, 44, 48, 52, 56, 60	 1777 1777HRC	24 x 48 x 5/8" 24 x 48 x 5/8"		0.50	35	Class A	0.83 ●	●	●	●	●	●	Std High	●	30
	29, 44, 48, 52, 56, 60	Other Sizes	W: 12" - 30" / L: 18" - 72" 5/8" Thick		0.50	35	Class A	0.83 ●	●	Std	●	●	—	Std	●	1

**SUSPENSION SYSTEMS**

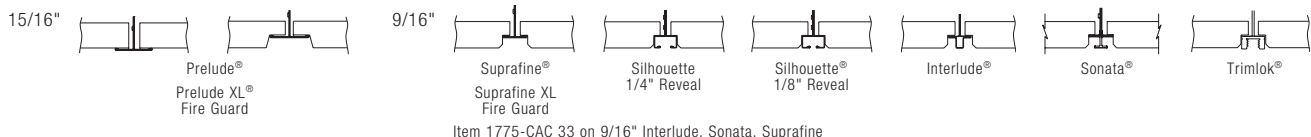

**PHYSICAL DATA**

**Material**  
Wet-formed mineral fiber

**Surface Finish**  
Factory-applied latex paint

**Fire Performance**  
ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index 25 or less. Smoke Developed Index 50 or less. (UL labeled) Fire Guard™: A fire resistive ceiling when used in applicable UL assemblies

**ASTM E1264 Classification**  
Type III, Form 2, Pattern C E  
Fire Class A

**Sag Resistance**  
HumiGuard® Plus – superior resistance to sagging in high humidity conditions up to, but not including, standing water and outdoor applications. Excluding items 1796, 1798, and large other sizes.

**Anti Mold/Mildew & Bacteria**  
BioBlock® Plus contains an anti-microbial treatment and provides guaranteed resistance against growth of mold/mildew and Gram-positive and Gram-negative odor/stain-causing bacteria for 30 years.

**VOC Emissions**  
Third party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.1, 2010. This standard is the guideline for low emissions in LEED, CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

**Primary (Embodied) Energy**  
See all LCA information on our EPD's.

**High Recycled Content\***  
Contains greater than 50% total recycled content. Total recycled content based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines.

**Insulation Value**  
R Factor – 1.6 (BTU units)  
R Factor – 0.28 (Watts units)

**30-Year Performance Guarantee & Warranty†**  
When installed with Armstrong Suspension System. Details at [armstrong.com/warranty](http://armstrong.com/warranty) (Excludes item 1746, 1798, and large other sizes)

**Weight; Square Feet/Carton**  
1772 – 0.94 lbs/SF; 64 SF/ctn  
1773 – 0.88 lbs/SF; 80 SF/ctn  
1796 – 1.33 lbs/SF; 67 SF/ctn  
1798 – 1.14 lbs/SF; 50 SF/ctn  
1850 – 1.19 lbs/SF; 48 SF/ctn  
1851 – 1.22 lbs/SF; 64 SF/ctn  
1774, 1775 – 0.75 lbs/SF; 64 SF/ctn  
1776, 1777 – 0.75 lbs/SF; 80 SF/ctn  
1852, 1853 – 1.20 lbs/SF; 48 SF/ctn

**Minimum Order Quantity**  
1 carton, excludes other sizes

**Metric Items Available**  
1772M, 1850M, 1773M, 1851M, 1796M, 1798M, 1775M, 1777M  
Metric items are subject to extended lead times and minimum quantities. Contact your representative for more details.



**TechLine™ / 1 877 ARMSTRONG**  
[armstrong.com/commcceilings](http://armstrong.com/commcceilings)  
(search: dune)  
BPCS-4351-413

LEED® is a registered trademark of the U.S. Green Building Council  
All other trademarks used herein are the property of AWI Licensing Company and/or its affiliates © 2013 AWI Licensing Company  
Printed in the United States of America

