Create![™] ULTIMA[®], ULTIMA Health Zone[™], and OPTIMA[®] Square Lay-in, Tegular & Vector®

fine texture



Ultima Create! Vector with Prelude® 15/16" suspension system (Pg. 259)

KEY SELECTION ATTRIBUTES

- · Artistic designs have broad appeal and complement unique interior design
- Mix and match designs with standard Ultima, Ultima Health Zone, and Optima
- Excellent sound absorption NRC 0.70 - 0.90
- · All the high performance benefits of Ultima or Optima fine-textured ceilings: - Water-repellent (Ultima Health Zone)
- · Product is directional
- · Custom samples available
- · Can contribute to LEED® credits

TYPICAL APPLICATIONS

- Classrooms

- · Restaurant



Ultima, Ultima Health Zone, or Optima Ceiling Panels





- · Libraries/media centers
- · Lobbies/reception areas
- Retail

CREATE!™ MAKES IT EASY TO CREATE UNIQUE, CUSTOM CEILING DESIGNS USING COLOR AND ARTWORK.

Original Artwork Guidelines:

- · Artwork must be vector-based
- · Acceptable file types:

165

- Adobe® Illustrator® .ai - Encapsulated PostScript – .eps
- Scalable Vector Graphics .svg
- Acceptable Color Mode: CMYK

Original Digital Image Requirements:

- · Image must be 150 dpi at full print size · Acceptable file types:
- Joint Photographic Experts Group .jpg
 Tagged Image File Format .tiff

Solid Color Requirements:

- Choose from 100 color options suggested on Armstrong Create! sample*
- · Choose to match one of the RAL classic colors available on suspension systems and perimeter trims
- · Custom colors are available
- * The Ultima/Optima colors and the Health Zone colors appear slightly different due to scrim surface texture.

Adobe® Illustrator® is a registered trademark of Adobe Systems Incorporated.




Create![™] ULTIMA[®], ULTIMA Health Zone[™], and OPTIMA[®]

Square Lay-in, Tegular & Vector®

fine texture

THEMES - AVAILABLE ON ALL CREATE! PANELS

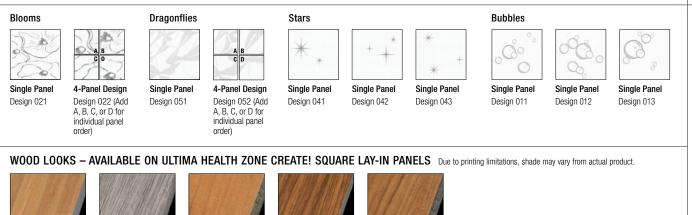









Bamboo (BA)



Choose from the standard colors shown on the front of Create! 6" x 6" submittal samples. Keep in mind,

sheen varies slightly depending on base panel selection (Ultima, Ultima Health Zone, Optima). Custom colors available.





Ultima Health Zone Create! in Walnut with coordinating suspension system and trim

COORDINATING SUSPENSION SYSTEM AND TRIM COLORS Due to printing limitations, shade may vary from actual product.







Wood Looks







Walnut (WN)



Barnwood (BW)

Light Cherry (LC)

0ak (0K)







Create!^M – ULTIMA[®], ULTIMA Health Zone^M, and OPTIMA[®]

Square Lay-in, Tegular & Vector® fine texture




	VISUAL SELECTION PERFORMANCE Dots represent high level of performance.														
Edge Profile		ltem	Dimensions	Acoustics		6u	Anti-Mold & Mildew	Sag Resist	Cerified Low VOC Emissions	Durability		Recycled Content *	Recycle Program	Warranty⁺	
	Suspension System	No.	(Inches)	NRC	CAC	Fire Rating	\otimes	6	Cerit VOC		6		Cont	\mathbf{O}	Warı
ULTIMA or OPTIMA Create! Square Lay-in			UL Classified			BioBlock+	Humi- Guard+		Water Repel	Wash	Soil		Yes	No. of Years	
	for 15/16" Prelude XL	Z1910UC1	24 x 24 x 3/4"	0.70 ^{††}	35	Class A	•	•	•	-	•	•	High	•	30
		Z33520C1	24 x 24 x 3/4"	0.90 ^{††}	26	Class A	•	•	-	-	•	•	High	•	30
ULTIMA Create! Tegular															
	for 9/16" Silhouette XL ONLY; 1/4" or 1/8" Reveal	Z1912UC1	24 x 24 x 3/4" 🗌	0.70 ^{††}	35	Class A	•	•	•	-	٠	•	High	•	30
ULTIMA or OPTIMA Create! Vector															
	for 15/16" Prelude XL (White only)	Z1920UC1	24 x 24 x 3/4" 🗌	0.70 ⁺⁺	33	Class A	•	•	•	-	•	•	High	•	30
		Z39010C1	24 x 24 x 7/8" 🗌	0.80††	26	Class A	•	•				•	High	•	30
		23501001	24 X 24 X 770	•	20	01855 A	•	•	-	-	·	•	riigii	•	50
ULTIMA Health Zone Create! Square Lay-in															
	for 15/16" Prelude XL	Z1935UC1•	◆ 24 x 24 x 3/4" □	0.70 ⁺⁺	35	Class A	•	•	•	•	•	•	High	•	30
		Orestal Territ													
ULTIMA Health Zone Create! Tegular															
	for 9/16" Silhouette XL ONLY; 1/4" or 1/8" Revea	Z1936UC1	24 x 24 x 3/4" 🗌	0.70 ⁺⁺	35	Class A	•	•	•	•	•	•	High	•	30

NOTE: Replacement panels may vary slightly in color due to material variations over time. Product could have slight color variation from run to run; adequate attic stock should be ordered.


^{††} Based on image/color coverage, NRC may vary slightly.


◆ Add 2-letter color suffix to item when specifying or ordering standard Wood Looks items. (e.g., Z1935UC1 L C)


SUSPENSION SYSTEMS AND EDGE DETAILS



(White suspension required for Vector)







360° Painted Grid

PHYSICAL DATA

INERAL FIBER

Ultima/Ultima Health Zone: Wet-formed mineral fiber Optima: Fiberglass with DuraBrite® acoustically transparent membrane with CAC-backing

Surface Finish

Factory-applied latex paint with UV printing

Fire Performance ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index 25 or less. Smoke Developed Index 50 or less. (UL labeled)

ASTM E1264 Classification



Ultima/Ultima Health Zone: Type III, Form 2, Pattern E Optima: Type XII, Form 2, Pattern E Fire Class A

Sag Resistance

HumiGuard[®] Plus - superior resistance to sagging in high humidity conditions up to, but not including, standing water and outdoor applications.

Anti Mold/Mildew & Bacteria

Ann wold/Mindew & Bacteria Ultima/Ultima Health Zone: BioBlock® Plus contains an anti-microbial treatment and provides guaranteed resistance against growth of mold/mildew and Gram-positive and Gram-negative odor/stain-causing bacteria for 30 years for 30 years.

Optima: Fiberglass substrate is inherently resistant to the growth of mold, mildew, and bacteria. **VOC Emissions**

VUC Emissions Ultima/Ultima Health Zone: Third party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.1, 2010. This standard is the guideline for low emissions in LEED, CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

High Recycled Content*

Contains greater than 50% total recycled content. Total recycled content based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines.

Insulation Value

- Ultima/Ultima Health Zone:
- R Factor 1.6 (BTU units) R Factor 0.28 (Watts units)
- Optima:
- R Factor 4.0 (BTU units) R Factor 0.70 (Watts units)

30-Year Performance Guarantee & Warranty⁺

When installed with Armstrong Suspension System. 1-year limited warranty on color.

Details at armstrong.com/warranty

Weight; Square Feet/Carton Ultima/Ultima Health Zone: 1.05 lbs/SF; 16 SF/ctn Optima: 0.55 lbs/SF; 16 SF/ctn

Minimum Order Quantity: 1 carton



\$\$ \$\$

67